

MODULE ALUMINIUM SCAFFOLDING FAVORIT

0.7 x 2.0 m




- Stable light aluminium scaffolding based on modular principle.
- Possibility of additional heightening of scaffolding with additional modules.
- It complies with the standard HD 1004.
- Possibility of moving aside on the foundation frame.
- Scaffolding class 3, load capacity 200 kg/m².
- Fast assembly without using tools – fixing connections and quick-closing devices.
- Moreover the scaffolding 8.00 and 11.00 m high are equipped with triangular height adjustable supports.

Scaffolding prices in the table are summation of individual modules!

- If ordering, quote the modules combinations, please (A + B + C + D).
- Additionally you can order wheels of a 125 mm diameter with brake **Type: 3407**.

Additional module is marked in red.

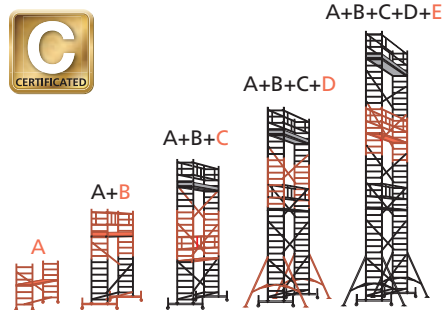

TYPE	MODUL
3402	A
3403	B
3404	C
3405	D
3406	E

ORDER MODULE	A	A + B	A + B + C	A + B + C + D	A + B + C + D + E
TYPE	3402	3402 + 3403	3402 + 3403 + 3404	3402 + 3403 + 3404 + 3405	3402 + 3403 + 3404 + 3405 + 3406
Working height (m)	2.80	5.00	7.00	9.00	12.00
Scaffolding height (m)	1.80	4.00	6.00	8.00	11.00
Working floor height (m)	0.80	3.00	5.00	7.00	10.00
Base width (m)	0.70	1.65	1.65	2.80	2.80
Weight (kg)	29.40	83.10	125.30	163.10	221.40