

CARSTOP, CONDUCTIVE CURBS



Carstop ▲

Type: 4369

- Carstop is to be used to prevent spontaneous shift of cars or to mark borders of car-parks.
- Can be used particularly in motor repair shops, garages or parking areas. The product must be assembled with screws.

📦 2.5 kg

📏 780 x 80 x 60 mm

Conductive curbs ►


- The curb segments are made from recycled material. The segments are interconnected with a hinge on the top of each section (in the spot of connection the curbs can be fixed on the ground) by jointing materials (not a part of a standard delivery).
- Serves for short-term or permanent division of islands, pavements, road shoulders, roundabouts etc.

📦 12 kg

📏 580 x 160 x 158 mm

🎨 white, red

Type: 4018 – red Type: 4019 – white

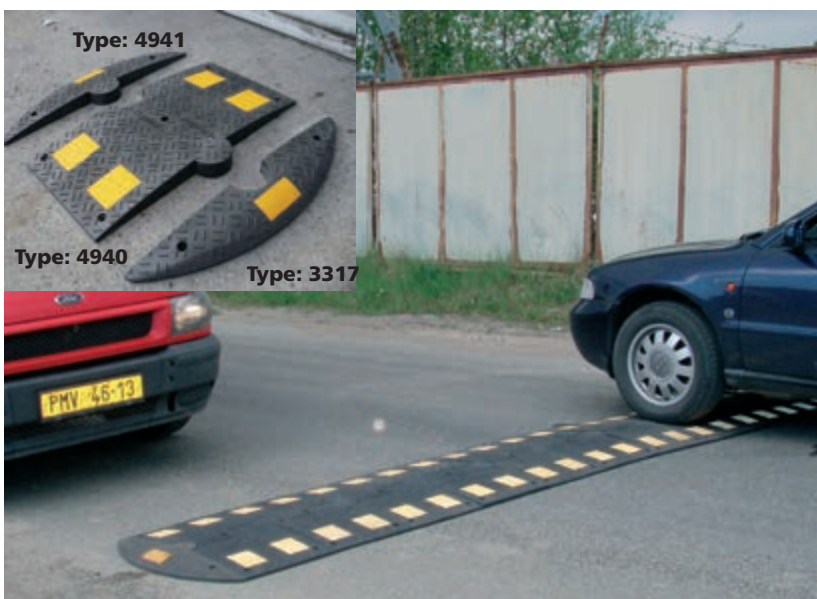

◀ Slowdown speed bumps

– universal

- Traffic facility serving to reduce the speeds of vehicles.
- Individual parts are provided with reflecting elements creating black and yellow strip when put together.
- It consists of inner and side elements.
- Semicircular locks together with anchors ensure their solid connection without need to use a rail.
- Bigger width (800 mm) of bumps enables their smoother crossing.
- Connecting material (screw Ø 10 x 140 mm, washer Ø 13 mm, and expandable socket 14 x 140 mm) forms a part of delivery.

Continuous part Type: 4940

📦 15 kg

📏 400 x 800 x 52 mm

End part Type: 4941, 3317

📦 5 kg

📏 150 x 800 x 52 mm