

PALLET TRUCKS



Truck BT 2300 – polyur. singel

Type: 4695

- Easy operating and light pumping for low muscular stress.
- Very safe with impaired accident risk.
- Provided with bushes as well as lubricating cans for effective maintenance.
- Sensitive starting controllable with fingertips.
- Rustless by-pass valve provides for reliable control of hydraulics.
- Wide wheels for easy travel.
- The truck is solid, robust and light due to high-strength steel used for chassis.
- Demonstrably lowest operating costs in the market.

Truck with quicklifting

Type: 4696

- The forks reach a pallet with first pumping and lift a load within a second.
- Fit for the use with great quantity of pallets.



Lifelong warranty for the frame!

MADE IN SWEDEN

Truck with easy start ▼

Type: 4697

- The truck reduces your effort with manipulation with heavy pallets by 70% compared with common types.
- The system operates in both directions of a travel and is activated by a lever on a control handle. Its principle is to get over heavy load inertia and save labour of operator in particular at the start and getting over irregularities.
- Unique solution for demanding applications.
- Easy and precise positioning of heavy loads.
- Smooth start on uneven surfaces and sills.
- Very ergonomic solution, reduces arm, shoulder and back strain.
- Higher productivity.
- Directing wheel – polyurethane, Ø 175 x 60 mm.
- Wheels in forks – nylon, Ø 85 x 100 mm.

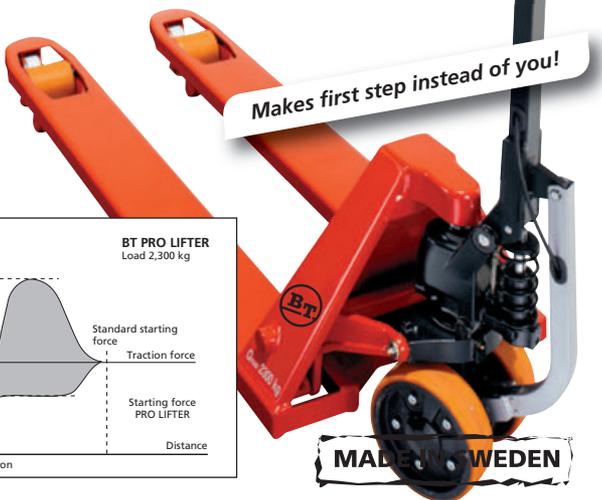

MADE IN SWEDEN

TYPE	NAME	WHEELS	WIDTH / LENGTH OF FORKS (mm)	MAX. LIFT (mm)	WEIGHT (kg)	LOAD CAPACITY (kg)
4695	Truck BT 2300	polyurethane	520 / 1,150	200	63	2,300
4696	Truck with quicklifting	polyurethane	520 / 1,150	200	63	2,300
4697	Truck with easy start	polyurethane	520 / 1,150	200	63	2,300
3458	Accumulator battery pallet truck	polyurethane	540 / 1,150	200	160	1,500



Low-lift pallet truck with accumulator

Type: 3458

- Low-lift pallet truck with accumulator travel is constructed on the basis of standard pallet trucks.
- One of this truck advantages is its battery travel, which can be used mainly while working in hard working conditions.
- Travel speed regulation is non-polar like in case of high-lift and low-lift accumulator trucks.
- Extra load capacity of the truck with accumulator travel 1,500 kg.
- Engine 0.4 kW, battery 12 V / 40 Ah.
- Truck is equipped with electromagnetic brake.