CARSTOP, CONDUCTIVE CURBS

Carstop ▲

Type: 4369

- Carstop is to be used to prevent spontaneous shift of cars or to mark borders of car-parks.
- Can be used particularly in motor repair shops, garages or parking areas. The product must be assembled with screws.

2.5 kg

780 x 80 x 60 mm

Conductive curbs ▶

- The curb segments are made from recycled material. The segments are interconnected with a hinge on the top of each section (in the spot of connection the curbs can be fixed on the ground) by jointing materials (not a part of a standard delivery).
- Serves for short-term or permanent division of islands, pavements, road shoulders, roundabouts etc.

12 kg

580 x 160 x 158 mm

white, red

Type: 4018 – red **Type: 4019** – white

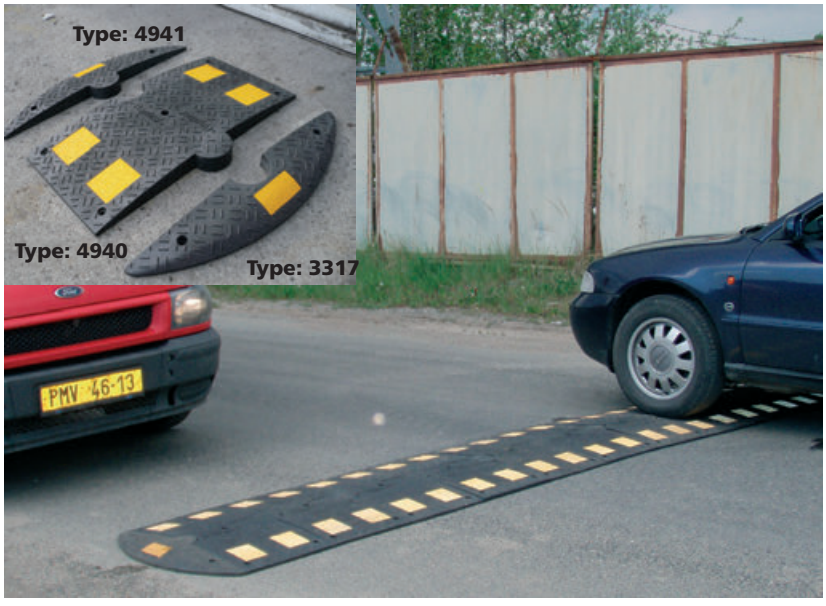

◀ Slowdown speed bumps – universal

- Traffic facility serving to reduce the speeds of vehicles.
- Individual parts are provided with reflecting elements creating black and yellow strip when put together.
- It consists of inner and side elements.
- Semicircular locks together with anchors ensure their solid connection without need to use a rail.
- Bigger width (800 mm) of bumps enables their smoother crossing.
- Connecting material (screw Ø 10 x 140 mm, washer Ø 13 mm, and expandable socket 14 x 140 mm) forms a part of delivery.

Continuous part **Type: 4940**

15 kg

400 x 800 x 52 mm

End part **Type: 4941, 3317**

5 kg

150 x 800 x 52 mm