

# ELECTRIC PUMPS

PUMPS FOR DIESEL OIL AND LIGHT FUEL OILS

*Pumps will find wide use in industry, building engineering, agriculture etc.*



**Type: 6681**

## Type: 6681

- Drive – 230 V.
- Suction tube 1,600 mm.
- Viscosity 5–20 mPas.
- Suction hose permits pumping from hardly accessible places.
- Pump is provided with a suction hose 1.6 m with a filter and 4 m delivery hose, delivery nozzle, 2" screw union for connection to the barrel.
- Hand pump is integrated inside the pump.

3.6 kg


36 l/min.

## Digital flowmeter

### Type: 6682

- Two-line display.
- Current and total issuance index with memory.
- Intended for in-company issuance.
- Guaranteed measuring deviation when the offtake is  $\pm 1-2\%$  at 5–90 l/min.

**Type: 6686**

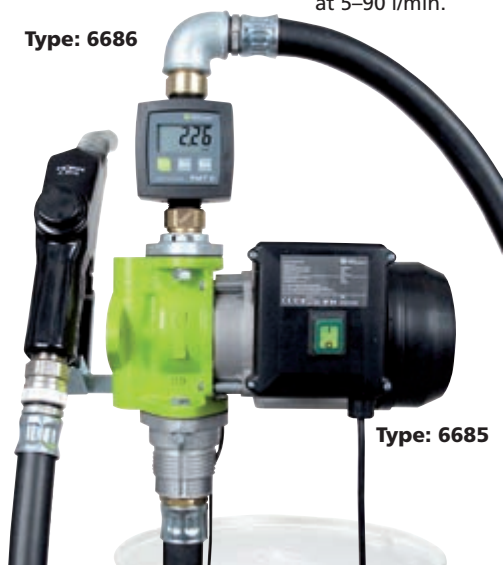

**Type: 6685**

## Type: 6685

- Drive – 230 V.
- Suction hose 1,600 mm.
- Viscosity 5–20 mPas.
- Suction hose permits pumping from badly accessible places.
- Pump is provided with a 1.6 m suction hose with a filter and 4 m delivery hose, automatic delivery nozzle 2" screw union for connection to the barrel.

12.5 kg

80 l/min.

## Digital flowmeter Type: 6686

- Two-line display.
- Current and total issuance index.
- With a memory.
- Intended for an in- company issuance.
- Guaranteed measuring deviation when the offtake is  $\pm 1\%$  at 5–90 l/min.



**Type: 6684**

**Type: 6683**

## Type: 6683

- Drive – 230 V.
- Suction hose 1,600 mm.
- Viscosity 5–20 mPas.
- Suction hose permits pumping from badly accessible places.
- Pump is provided with a suction hose 1.6 m with a filter and 4 m delivery hose, automatic delivery nozzle, 2" screw union for connection to the barrel.

7.3 kg

55 l/min.

## Digital flowmeter

### Type: 6684

- Two-line display.
- Current and total issuance index.
- With a memory.
- Intended for an in- company issuance.
- Guaranteed measuring deviation when the offtake is  $\pm 1-2\%$  at 5–90 l/min.

## Pump for viscous oils Visconet II

### Type: 6687

- Drive – 230 V.
- Suction hose 840 mm.
- Possibility of pumping up to viscosity 200–2,000 mPas.
- Suction hose permits pumping from badly accessible places.
- Pump is provided with a 840 mm suction hose with a filter and 4 m delivery hose, automatic delivery nozzle 2" screw union for connection to the barrel or container.

13.5 kg

25 l/min.

## Digital flowmeter

### Type: 6688

- Two-line display.
- Current and total issuance index.
- Intended for an in- company issuance.
- Guaranteed measuring deviation when the offtake is  $\pm 1\%$  at 5–25 l/min.



**Type: 6688**

**Type: 6687**

Pump for high-viscous oils SAE 50/80