


# CANTILEVER RACKS – ADJUSTABLE

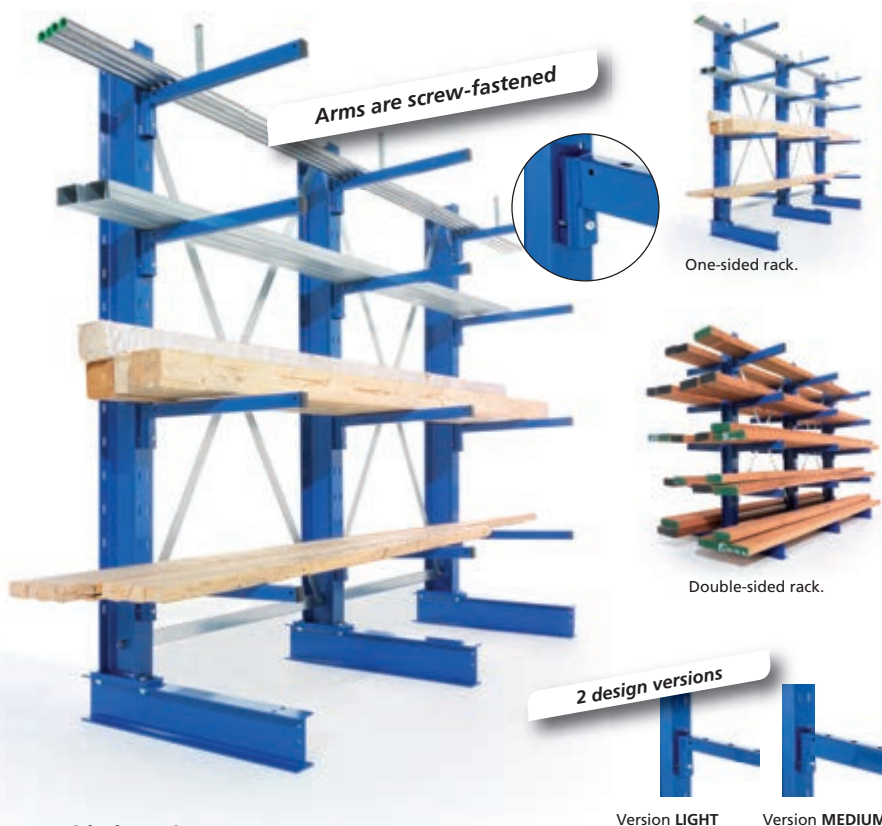

- Cantilever racks are used to store long articles such as pipes, battens, boards, rods etc.
- Rack webs are made of double-sided perforated steel beams for possible future conversion from one-sided version to double-sided one.
- Perforation is used to insert individual arms.
- Arms are secured against unhooking with a safety screw.
- Arms are height adjustable every 100 mm.
- Axis distance between individual webs is 1,330 mm.
- Racks can be extended with extension panels delivered including arms and braces.
- Delivered in one-sided or double-sided version.
- Rack footing has the same length as the arm length.
- Racks must be secured by anchoring with clamps, one web – two clamps (anchoring forms a part of delivery).
- Self-assembly.

## One-sided version LIGHT

TYPE		HEIGHT (mm)	NUMBER OF WEBS Basic / Extension	NUMBER OF ARMS	ARM LENGTH (mm)	ARM LOADING CAPACITY (kg)	WEB LOADING CAPACITY (kg)
BASIC PANEL	EXTENSION PANEL						
TYPE	TYPE						
7800	7801	2,500	2 / 1	4	400	220	1,610
7802	7803	2,500	2 / 1	4	500	175	1,300
7804	7805	2,500	2 / 1	4	600	140	1,120
7806	7807	3,000	2 / 1	5	400	220	1,500
7808	7809	3,000	2 / 1	5	500	175	1,200
7810	7811	3,000	2 / 1	5	600	140	1,000

## Double-sided version LIGHT

7812	7813	2,500	2 / 1	8	400	220	3,220
7814	7815	2,500	2 / 1	8	500	175	2,600
7816	7817	2,500	2 / 1	8	600	140	2,240
7818	7819	3,000	2 / 1	10	400	220	3,000
7820	7821	3,000	2 / 1	10	500	175	2,400
7822	7823	3,000	2 / 1	10	600	140	2,000

## One-sided version MEDIUM

TYPE		HEIGHT (mm)	NUMBER OF WEBS Basic / Extension	NUMBER OF ARMS	ARM LENGTH (mm)	ARM LOADING CAPACITY (kg)	WEB LOADING CAPACITY (kg)
BASIC PANEL	EXTENSION PANEL						
TYPE	TYPE						
7824	7825	2,500	2 / 1	4	400	535	2,500
7826	7827	2,500	2 / 1	4	600	355	1,900
7828	7829	2,500	2 / 1	4	800	250	1,500
7830	7831	3,000	2 / 1	5	400	535	2,300
7832	7833	3,000	2 / 1	5	600	355	1,750
7834	7835	3,000	2 / 1	5	800	250	1,250

## Double-sided version MEDIUM

7836	7837	2,500	2 / 1	8	400	535	5,000
7838	7839	2,500	2 / 1	8	600	355	3,800
7840	7841	2,500	2 / 1	8	800	250	3,000
7842	7843	3,000	2 / 1	10	400	535	4,600
7844	7845	3,000	2 / 1	10	600	355	3,500
7846	7847	3,000	2 / 1	10	800	250	2,500