
TIPPING CONTAINERS

Profi container with a lid Type: 6570, 6571

- Easy system ensuring self-opening of the lid during the container dumping.
- Lid serves mainly as protection against rain and wind.



Easy and safe control from the driver's seat. Self-acting cover opening.



C – max. height
Pitch to axles of skids (X) given in the table.

A – max. depth

B – max. width

Height (C) is given without wheels / with wheels.

	5	5				
	TYPE	MAIN DIMENSIONS	Х	WEIGHT	CAPACITY	LOAD CAPACITY
	TIFE	A x B x C (mm)	(mm)	(kg)	(I)	(kg)
	6570	1,650 x 1,070 x 1,115/1,355	800	195	800	800
	6571	1,650 x 1,570 x 1,115/1,355	800	257	1,100	1,000

Profi container with double bottom Type: 7338, 7339

- Container is provided with a double bottom with outlet.
- Double bottom permits separating solid and liquid elements.





Double bottom serves for separation of solid and liquid parts.

Outlet valve on the container back side.

Container wheels for type 6570, 6571, 7338, 7339



- Suitable for smooth surfaces.



📃 300 kg

Type: 6369

Type: 6359


🚊 400 kg

Type: 6587

Type: 6581

surfaces.

These and other wheels can be found in the section TRANSPORT AND INSTRUMENT WHEELS.

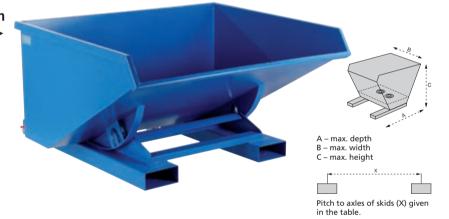

Tipping container

Type: 7074

- Container intended for collecting and handling waste or output semi-finished product.
- Handling by fork-lift truck.
- Tippling process can be carried out using a cord form the fork-lift driver's place.
- Body is safeguarded against spontaneous tipping.
- Container made to order can be delivered in another colour shade.

	,]
	,

195 -Dimensions fore fork

TYPE	MAIN DIMENSIONS A x B x C (mm)	X (mm)	WEIGHT (kg)	CAPACITY (I)	LOAD CAPACITY (kg)
7338	1,650 x 1,060 x 815/1,055	800	190	600	800
7339	1,650 x 1,570 x 815/1,055	800	213	900	1,000
7074	1,320 x 1,650 x 1,080/1,320	800	226	1,000	1,200

Height (C) is given without wheels / with wheels.