

PROTECTIVE PVC SCREENS

MOBILE SCREENS FOR WELDING SHOPS




- Screens are used for interior and exterior temperature separation of areas.
- They are made of PVC material, do not contain any cadmium nor silicone.
- They are resistant to a large amount of chemicals and can be used in temperatures from -15°C up to $+50^{\circ}\text{C}$.
- They serve as a barrier against smoke, fumes, dust or insect and birds.
- They are lowering noise and have high transparency.
- As standard, transparent screens are delivered for common temperatures and screens for refrigeration plants in rolls of 50 m length. Made-to-measure screens can be delivered for spaces of welding, mechanically resistant screens or coloured screens.



marking




welding




shockproof



Simple assembly, disassembly and also replacement of damaged screen.




Type: 7238
standard




Type: 7239
heatproof

Ways of suspension and possibilities of overlap


minimum overlap 35%

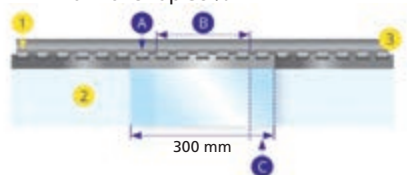


middle overlap 54%

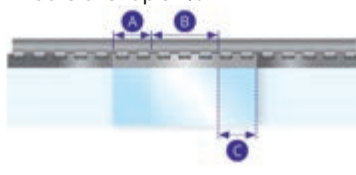

maximum overlap 90%



lower suspension front suspension

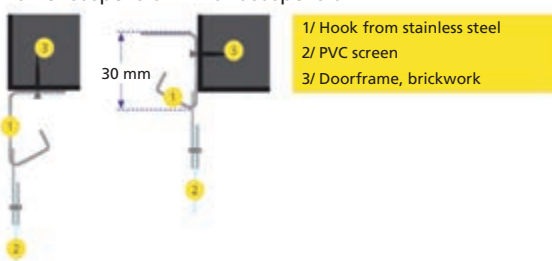

TYPE	DESCRIPTION	WIDTH (mm)	THICKNESS (mm)	WINDING (m)
7238	Belt screen	300	2	50
7239	Belt screen – thermally resistant	300	3	50
7240	Suspension with lugs (5 pcs)	300	–	–
7241	Ridge with hooks	984	–	–

Mobile screens for welding shops ►

- It serves mainly for visual separation of welding workplaces.
- Light easily manipulable structures of partitions are made of steel sections.
- In order to ensure easy handling of the barrier there are braked wheels of a diameter of 80 mm fitted on the one side and a supporting leg 600 mm wide on the other side.
- Individual partitions can be joined in any quantity and thus they can create a continuous wall. System of suspensions enables to connect them in a different angle and to create individual workplaces as for shape.
- Canvas made of fireproof material providing hazardous radiation protection and it is resistant to balls and sparks flying off.
- Canvas in dark green design corresponds to EN 1598.

TYPE	DIMENSIONS w x d x h (mm)	WEIGHT (kg)
7300	1,500 x 600 x 2,200	28
7301	2,000 x 600 x 2,200	32
7302	2,500 x 600 x 2,200	38



Detail of connecting.

- Canvas can be delivered made from impregnated fireproof textile if made to order.