

MOBILE FENCING



- Fast, easy and effective boundary of sporting or cultural actions or construction sites. They can also be applied in the area of industry when separating industrial floor spaces or storage grounds.
- Frame from galvanized tube with D 42 and 30 mm is filled with wire filling with D 3.5 m. All its components are galvanized and subsequently welded. This is the reason why tiny corrosion can occur in the welded but this is not a cause for complaint.
- Mobile fence is delivered 3,472 mm long and in two heights 1,125 mm and 2,000 mm. Mobile fence is installed in plastic or concrete footing and it is delivered including connecting clasps.



Carrying foot made of recycled material

Type: 3812

- 16 kg
- 780 x 290 x 140 mm




Concrete foot

Type: 3811

- 27.5 kg
- 700 x 200 x 130 mm

height 2,000 mm

height 1,125 mm

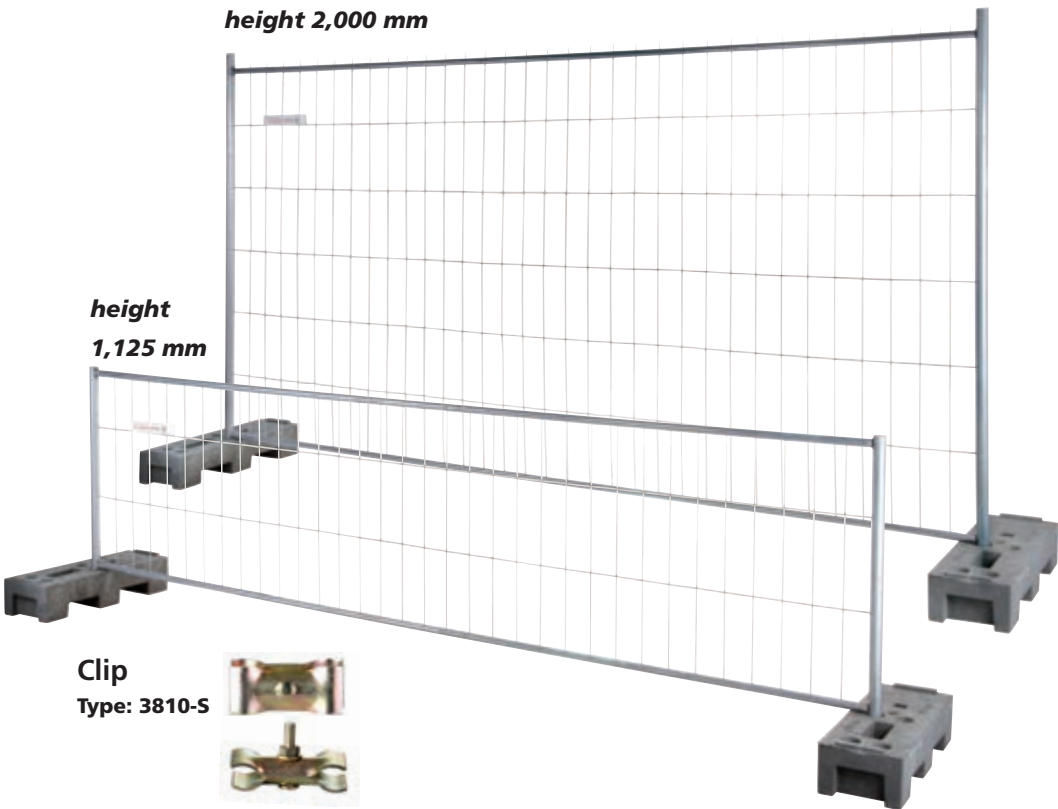

Clip
Type: 3810-S



TYPE	MAIN DIMENSIONS (mm)	WEIGHT (kg)	MESH SIZE (mm)
3809	3,472 x 1,125	16	100 x 300
3810	3,472 x 2,000	18.5	100 x 200