

# MOBILE ECO – DEPOT



## ECO – DEPOT

- Depot designed for storage of dangerous substances.
- Trapping tub equipped with hot-dip galvanized grates.
- Structure including its casing completely hot-dip galvanized. Upon request the galvanized container can be coated with paint.
- Single-leaf door with walk-through dimension 1,240 x 1,963 mm as standard.
- Grate load 1,000 kg/m<sup>2</sup>. Roof load 125 kg/m<sup>2</sup>.
- Certified according to "DIBt".



Depots are delivered in 4 certified versions. They are suitable for storage of:

- water endangering substances.
- fire substances (it's necessary to order a grounding kit).
- water endangering substances with thermal insulation.
- fire substances with thermal insulation (it's necessary to order a grounding kit).

OUTSIDE DIM. (mm)	INSIDE DIM. (mm)	WEIGHT (kg)	RETAINING VOLUME (l)				
2,350 x 915 x 2,196	2,152 x 830 x 2,051	240	300	<b>Type: 7632-W</b>	<b>Type: 7632-N</b>	<b>Type: 7632-TB</b>	<b>Type: 7632-TA*</b>
2,985 x 2,350 x 2,196	2,900 x 2,152 x 2,051	650	1000	<b>Type: 7633-W</b>	<b>Type: 7633-N</b>	<b>Type: 7633-TB</b>	<b>Type: 7633-TA*</b>
4,020 x 2,350 x 2,216	3,935 x 2,152 x 2,051	820	1000	<b>Type: 7634-W</b>	<b>Type: 7634-N</b>	<b>Type: 7634-TB</b>	<b>Type: 7634-TA*</b>

**Type: 7646** Set for earthing

\* As for depots for inflammables **7632,3,4-TA** it is necessary to order the circuit breaker box **Type: 7645** and technical ventilation **Type: 7642-EX**.

## Optional accessories

In case of ordering any electric accessories, it is necessary to order switchboard **Type: 7645**.



**Type: 7636**  
Lighting with a switch 2 x 58 W

**Type: 7636-EX**  
Lighting with a switch 2 x 58 W EX



**Type: 7645**  
Circuit breaker box IP54



**Type: 7637**  
Socket 230 V

**Type: 7637-EX**  
Socket 230 V EX



**Type: 7644**  
Double-wing door for depots 7632, 7633 and 7634



**Type: 7638**  
Heating convector 2 kW with thermoregulator

**Type: 7639**  
Heating convector 3 kW with thermoregulator




**Type: 7640**  
Heating EX 800 W with thermoregulator

**Type: 7641**  
Heating EX 1700 W with thermoregulator



**Type: 7642**  
Forced ventilation

**Type: 7642-EX**  
Forced ventilation EX

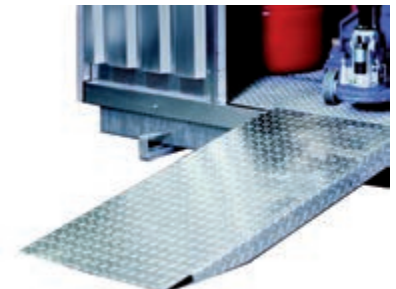

**Type: 7635**  
Access ramp